Section 1

1 : 100

Second Floor
6400

First Floor
3400

FARRINGDON SERVICE ROAD

Ground Floor
0

4100
400
557
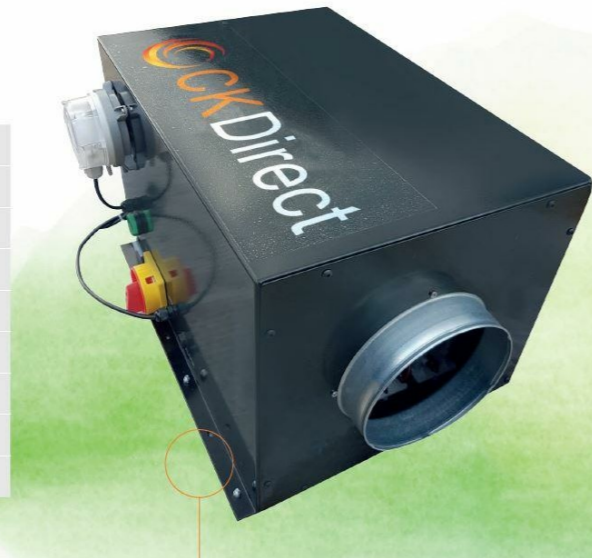2443
300

G F E D C B A

kitchen
70.08 m²

toilet
7.53 m²

toilet
9.48 m²

The GreenTeck OT-64G is a high efficiency ozone generator unit, ideal for use in commercial kitchens, food processing plants and factories. The unit is installed between the extraction point and the exhaust fan, external to the ductwork, making servicing and maintenance much easier. **The unit eliminates smells by oxidising pathogens in the exhaust pipes** and also prevents the build-up of residue in the ductwork, preventing failures in fans and fire hazards.

Maximum Power Requirement	343W
Voltage	Single Phase 240 V
Rated Current	1.5A
Fuse Rating	3A
Mains Frequency	50/60 Hz
Weight	~9kg
Dimensions (depth x width x height)	300mm x 340mm x 490mm
Reactor	64 grams / hour
Air flow rate	1000 m3/h

GREENTECK OT-64G OZONE GENERATOR

ALNOR SIL *100-300 100 200 350 SILENCER

A — COOKING PARTICULATES AND ODORUS
B — COMPANY GREASE FILTER
C — ESP - PARTICULATE CONTROL UNIT ESP 3000
D — CARBON UNIT 12x SITESAFA PA 240924
E — AEROFOIL 56JM FAN
F — ALNOR SIL *100-300 100 200 350 SILENCER
G — GREENTECK OT-64G OZONE GENERATOR

EXTRACTION SYSTEM